


8-OUTLET SURGE PROTECTOR (8 OUTLETS & 2 USB PORTS)

CSP806U / P806U / MP1021SS

USER MANUAL

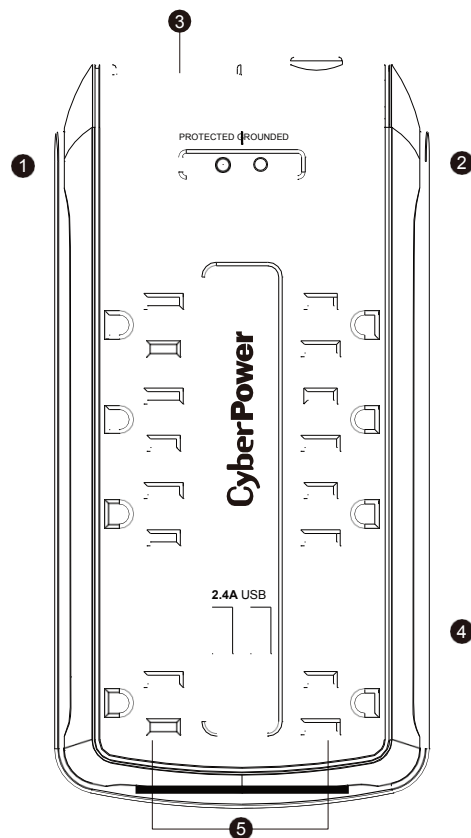

Cyber Power Systems (USA), Inc.

4241 12th Avenue East, Suite 400 | Shakopee, MN 55379

CyberPowerSystems.com

FEATURES

1. Protected LED Indicator

Illuminated when the surge protection feature is working properly.

2. Grounded LED Indicator

Illuminated when a properly grounded AC outlet is detected.

3. ON/OFF Reset Control Switch and Circuit Breaker

Controls power to all outlets. The switch is also a 15A breaker. When an overload occurs, it will automatically switch off. To resume operation, ensure the overload condition is removed and reset the surge protector by switching the unit ON.

4. USB Charging Ports *

Connect and charge up to two (2) USB devices using the surge protected USB charging ports.

*USB outlets cannot be used as a USB hub. This device does not transfer data.

5. Widely-Spaced Outlet

Easily plug in large chargers without interfering with the other outlets.

SPECIFICATIONS

Model Number:	CSP806U / P806U / MP1021SS
Outlets:	6 Standard Outlets, 2 Widely-Spaced Outlets; 2 USB Charge Ports (2.4 A, shared)
Surge Protection:	2,700 Joules
Electrical Rating:	125 V / 15 A / 1875 W
UL Clamping Voltage:	UL 1449 3rd / 600 V (H-N, H-G, N-G),
Maximum Peak Current:	105,000 A
3 AC Lines Protected:	H-N: 45,000 A, H-G: 30,000 A, N-G: 30,000 A
Response Time:	Less than 1 nanosecond
USB Charger Rating:	5 V / 2.4 A total
Circuit Breaker:	Resettable 15 Amp
Plug Style:	Right Angle Type
Power Cord Length:	6 ft.

⚠WARNING: This product can expose you to chemicals including bisphenol A (BPA) and styrene (ABS), which is known to the State of California to cause reproductive harm and cancer. For more information, go to www.P65Warnings.ca.gov.

CAUTION

TO REDUCE THE RISK OF ELECTRIC SHOCK:

Use only in dry locations and only indoors.

DO NOT plug into another relocatable power tap.

DO NOT "daisy chain" surge protectors.

DO NOT use with any aquarium equipment.

DO NOT use if properly grounded outlets are not available.

DO NOT install this device if there is less than 10 meters (30 feet) of wire between the electrical outlet and electrical service panel.

DO NOT use for medical or life support equipment. This device features an internal protection that will disconnect the surge protective component at the end of its useful life, but it will maintain unprotected power to the load.

TROUBLESHOOTING

If the ON/Off is switched off, the 15 A circuit breaker may have tripped. Examining your connected equipment and remove the device that is overloading the circuit. Then turn the ON/OFF switch back to RESET.

If the grounded indicator does not light when you plug in the surge protector, move the surge protector to a different grounded three-prong AC outlet. If it still does not light, return the product to the retailer for assistance. If the surge protector appears to be working properly, your outlets may not be properly grounded and need to be repaired by a professional electrician. If the grounded indicator turns off after a period of use, the surge protection has been depleted. Replace your surge protector.

If the protected indicator does not light, the surge protector's AC lines are no longer protected from surge. The surge protector may have received a power surge or spike beyond its specified limits that overloaded the protection circuitry and rendered it inactive. The surge protector has protected your connected equipment as designed, but it will not protect against future surges and spikes. It should be replaced.

FOR MORE INFORMATION

Visit CyberPowerSystems.com for more information regarding:

- Product information and certifications
- Product warranty
- Connected equipment guarantee

TECHNICAL SUPPORT

Visit: CyberPowerSystems.com/support

Toll-Free: 1-877-297-6937

Hours of Operation: Monday - Friday: 7:00am - 6:00pm CST

© 2023 Cyber Power Systems (USA), Inc. All rights reserved.
All other trademarks are the property of their respective owners.



CONFORMANCE APPROVALS

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against

harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

WARNING: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.